

# SLIPPROOFNZ


ANTI-SLIP SAFETY SOLUTIONS



## PRODUCT SPECIFICATIONS

**ALUMINIUM STAIR NOSING**

**Glow In The Dark**

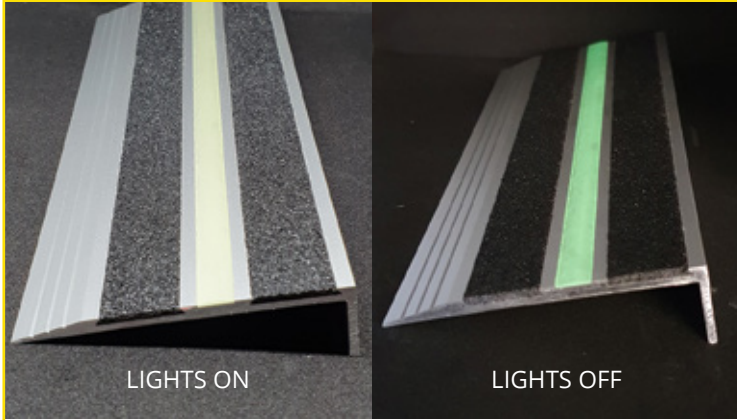


**SKU** AL-CAR-77-GLO

**CO-EFFICIENT OF FRICTION:** CLASS = P5


- BRIEF DESCRIPTION**
- Heavy duty anodised aluminium frame
  - High quality anodised aluminium stair nosing with two moulded Carborundum and one luminous glow in the dark strip for low light conditions
  - Guaranteed from delamination for 5 years from purchase date
  - Supplied cut to length or up to 3M length

**MAXIMUM LENGTH** 3 Metres

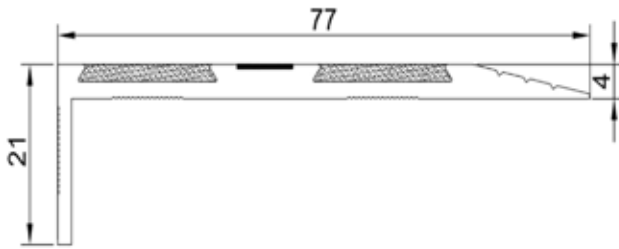

**ALUMINIUM STAIR NOSING - Carborundum 4 Strip**

**Available in Black / Safety Yellow**

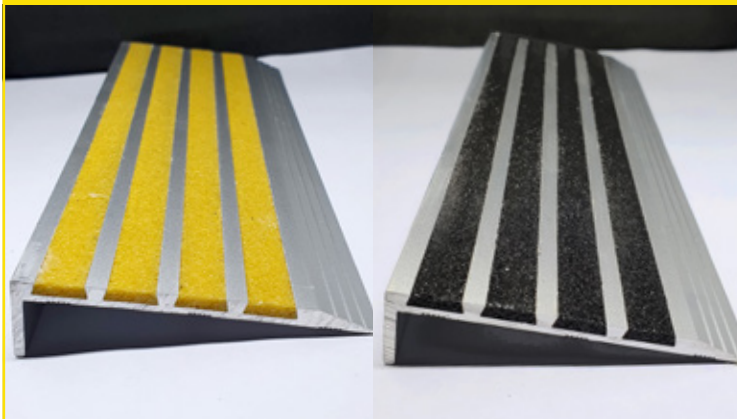


**SKU** A4-CAR-76B (Black)  
A4-CAR-76Y (Safety Yellow)

**CO-EFFICIENT OF FRICTION:** CLASS = P5



- BRIEF DESCRIPTION**
- High quality anodised aluminium stair nosing with 4 Carborundum moulded inserts
  - Extra heavy duty anodised aluminium frame
  - Available in Black or Safety Yellow
  - Guaranteed from delamination for 5 years from purchase date
  - Supplied cut to length or up to 3M length

**MAXIMUM LENGTH** 3 Metres

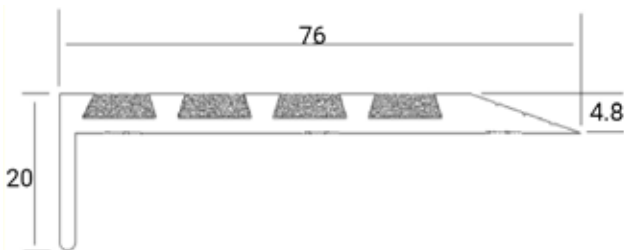

**ALUMINIUM STAIR NOSING - Carborundum Solid**

Available in Black / Safety Yellow

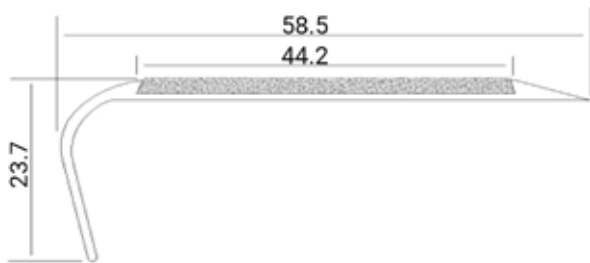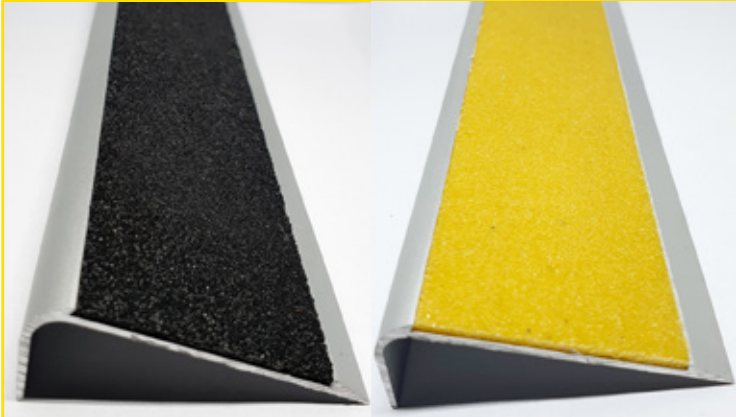

**SKU**

A1-CAR-59B (Black)  
A1-CAR-59Y (Safety Yellow)

**CO-EFFICIENT OF FRICTION:**

CLASS = P5



**BRIEF DESCRIPTION**

- High quality anodised aluminium Stair nosing with single wide moulded carborundum strip
- Heavy duty anodised aluminium frame
- Available in Black or Safety Yellow
- Guaranteed from delamination for 5 years from purchase date
- Supplied cut to length or up to 3M length

**MAXIMUM LENGTH**

3 Metres

**ALUMINIUM STAIR NOSING - Integrated**

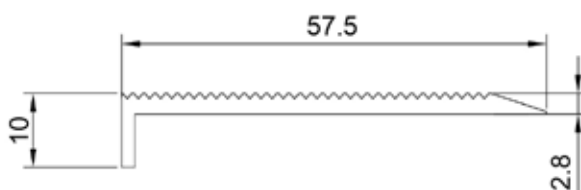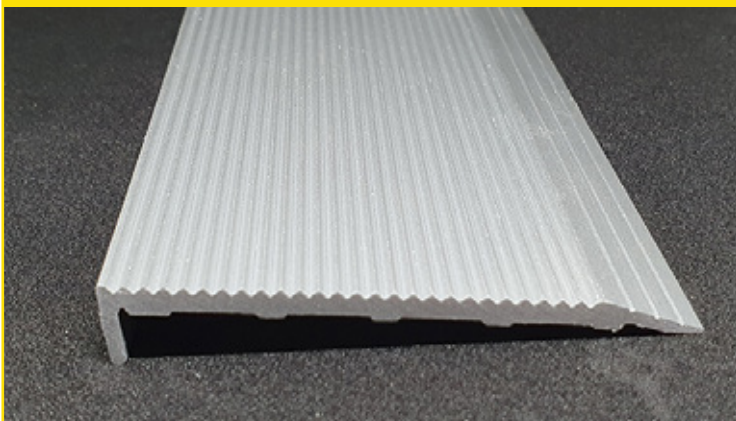

**SKU**

AAI-57

**CO-EFFICIENT OF FRICTION:**

CLASS = P5

**BRIEF DESCRIPTION**




- High Quality anodised aluminium nosing with integrated rib
- Heavy duty and cost effective
- Supplied cut to length or up to 3M length

**MAXIMUM LENGTH**

3 Metres

**ALUMINIUM STAIR NOSING - with Rubber Insert**

Available with Black / Safety Yellow Insert

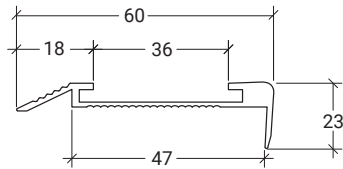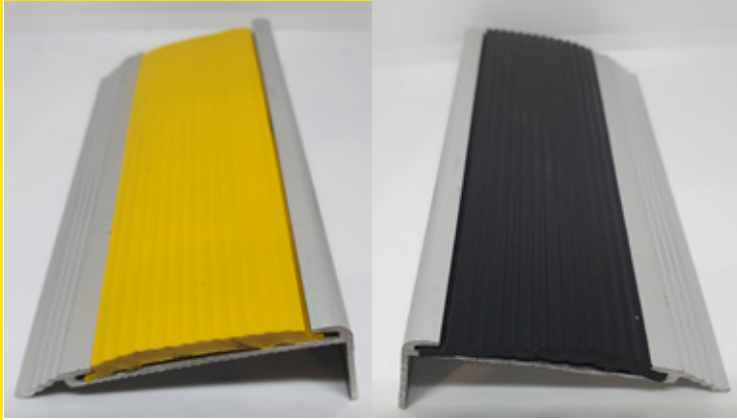

AD 60mm  
stair tread nosing cross section

**SKU** AD60B (Black)  
AD60Y (Safety Yellow)



**OPUS CO-EFFICIENT OF FRICTION:** MEAN BP = 39 CLASS = P3

- BRIEF DESCRIPTION**
- Pre drilled quality anodised aluminium stair nosing complete with PVC rubber insert.
  - Protect the stairs from further wear.
  - Price includes concrete plugs and stainless steel screws for fitting.
  - Available in 1m to 3m lengths.

**MAXIMUM LENGTH** 3 Metres

**ALUMINIUM STAIR NOSING - with Rubber Insert**

Glow In The Dark

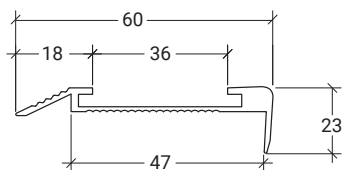

AD GLO 60mm  
stair tread nosing cross section



**SKU** AD60GLO

**OPUS CO-EFFICIENT OF FRICTION:** MEAN BP = 30 CLASS = P2

- BRIEF DESCRIPTION**
- Pre drilled quality anodised aluminium stair nosing complete with PVC rubber insert.
  - Protect the stairs from further wear.
  - Price includes concrete plugs and stainless steel screws for fitting.
  - Available in 1m to 3m lengths.
  - Glow in the dark

**MAXIMUM LENGTH** 3 Metres



**50X30MM MFRP STAIR NOSING**  
Available in Industrial Grey / Safety Yellow

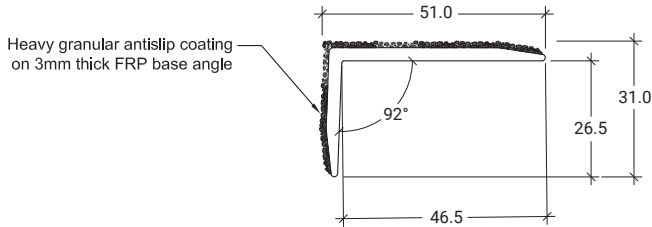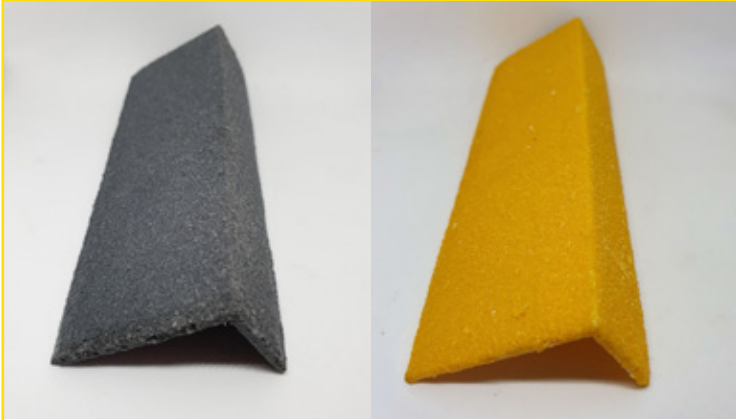

MFRP 50mm  
profile cross section

<b>SKU</b>	MFRP50G (Industrial Grey) MFRP50Y (Safety Yellow)
<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 88 CLASS = P5
<b>BRIEF DESCRIPTION</b>	<p>Manufactured from pressure moulded FRP impregnated with oxide grit.</p> <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> </ul> <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
<b>MAXIMUM LENGTH</b>	3 Metres



**50X30MM MFRP STAIR NOSING**  
Glow In The Dark

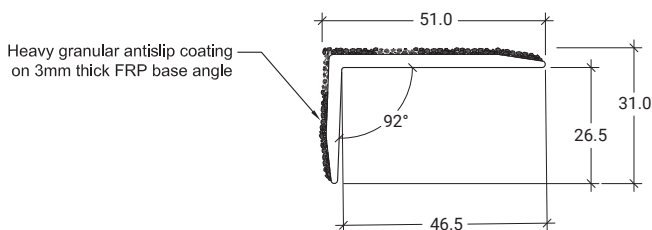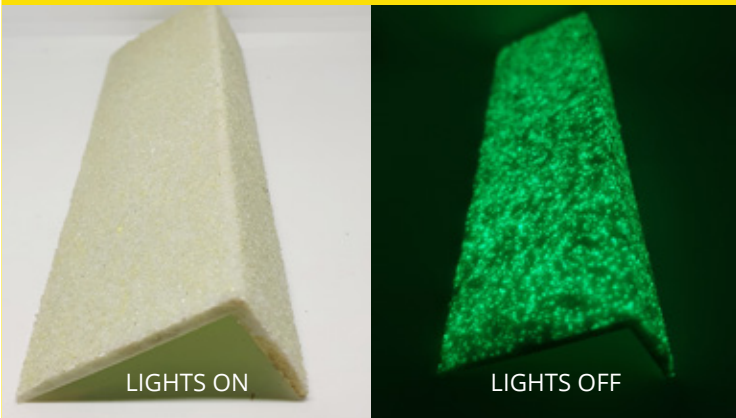

MFRP 50mm  
profile cross section

<b>SKU</b>	MFRP50-GLO
<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 88 CLASS = P5
<b>BRIEF DESCRIPTION</b>	<p>Manufactured from pressure moulded FRP impregnated with oxide grit.</p> <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> <li>• Glow in the dark</li> </ul> <p>Supplied in 1m - 3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
<b>MAXIMUM LENGTH</b>	3 Metres

**70X30MM MFRP STAIR NOSING**  
Available in Industrial Grey / Safety Yellow

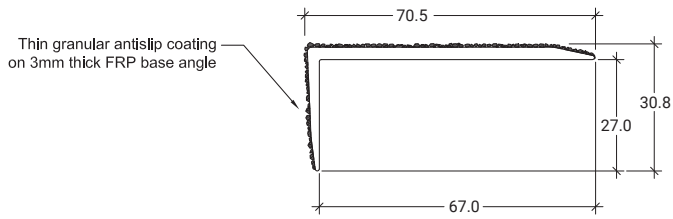
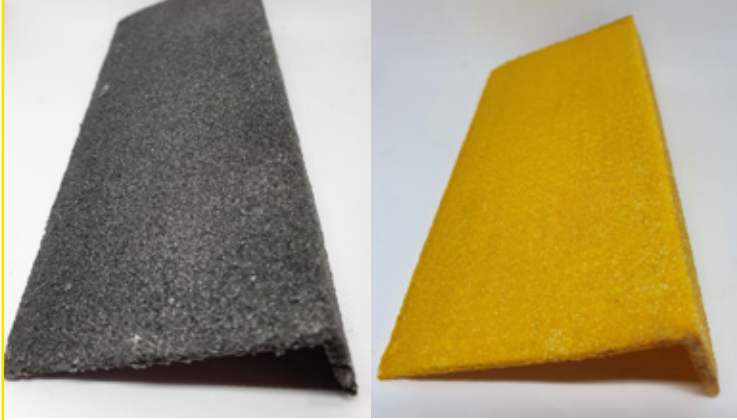


MFRP 70mm  
profile cross section

<b>SKU</b>	MFRP70G (Industrial Grey) MFRP70Y (Safety Yellow)
<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 95 CLASS = P5
<b>BRIEF DESCRIPTION</b>	<p>Manufactured from pressure moulded FRP impregnated with oxide grit.</p> <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> </ul> <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
<b>MAXIMUM LENGTH</b>	3 Metres

**50MM FRP DECK TREAD**

Available in Industrial Grey / Safety Yellow / Black

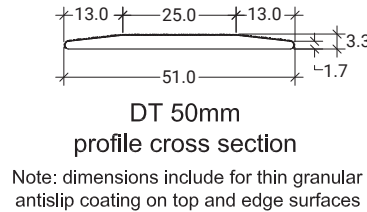
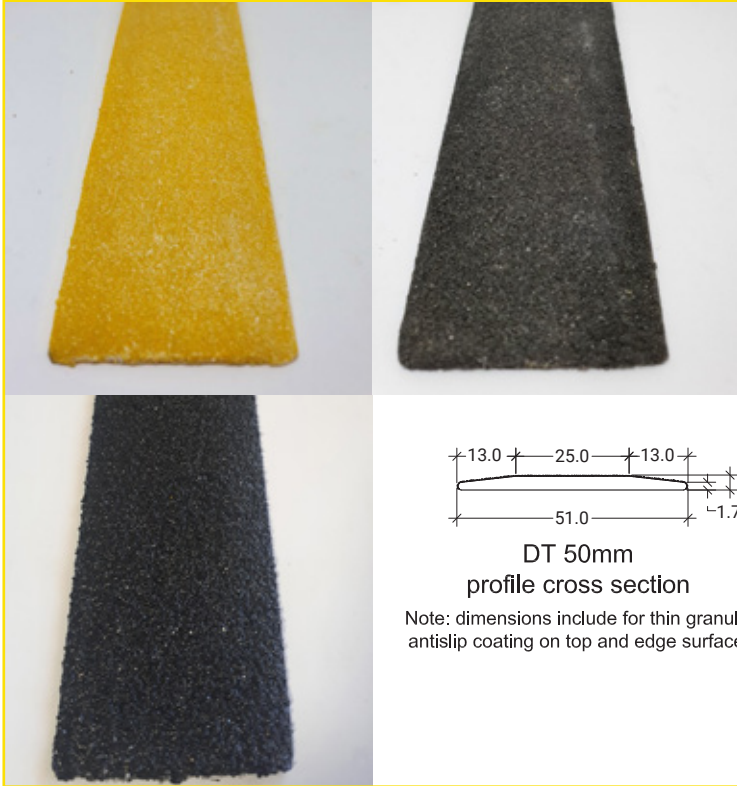


<b>SKU</b>	DT50G (Industrial Grey) DT50Y (Safety Yellow) DT50B (Black)
<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 77 CLASS = P5
<b>BRIEF DESCRIPTION</b>	Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit. <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> </ul> Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.

**MAXIMUM LENGTH** 3 Metres

**50MM FRP DECK TREAD**

Glow In The Dark

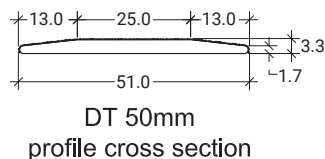
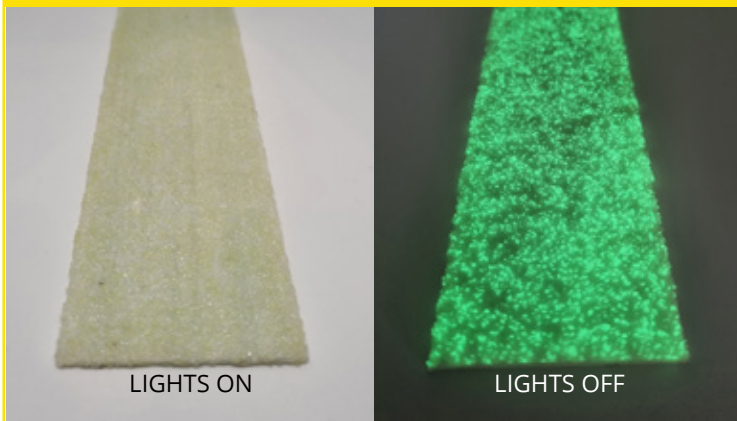


<b>SKU</b>	DT50GLO
<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 77 CLASS = P5
<b>BRIEF DESCRIPTION</b>	Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit. <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> </ul> Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.

**MAXIMUM LENGTH** 3 Metres

**90MM FRP DECK TREAD**

Available in Industrial Grey / Safety Yellow / Black

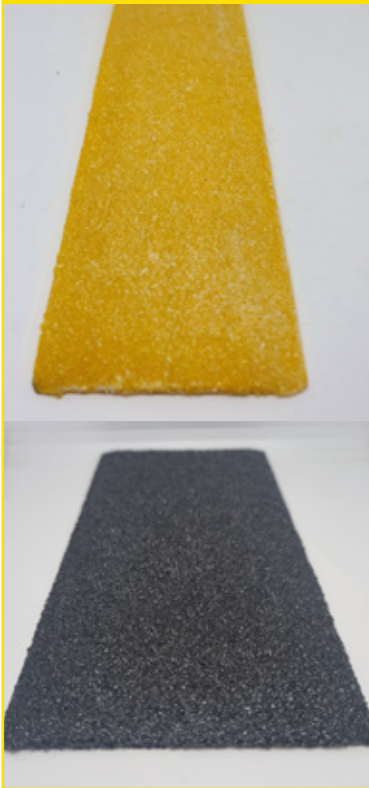

**DT 90mm  
profile cross section**

Note: dimensions include for 1mm thick granular anti-slip coating on top and edge surfaces

<b>SKU</b>	DT90G (Industrial Grey) DT90Y (Safety Yellow) DT90B (Black)
------------	---

<b>OPUS CO-EFFICIENT OF FRICTION:</b>	MEAN BP = 69 CLASS = P5
---------------------------------------	-------------------------


<b>BRIEF DESCRIPTION</b>	<p>Manufactured from pressure moulded fibreglass strips, with impregnated oxide grit.</p> <ul style="list-style-type: none"> <li>• Guaranteed from delamination for 5 years from purchase date</li> <li>• Corrosion resistant</li> <li>• Wear and impact resistant</li> <li>• UV resistant</li> <li>• Flame retardant</li> <li>• Light weight, easy to install and hard wearing</li> </ul> <p>Supplied in 1m -3m lengths or custom cut to length as required. Can be fitted using our Gorilla adhesive and/or screws.</p>
--------------------------	---

<b>MAXIMUM LENGTH</b>	3 Metres
-----------------------	----------



**FRP FLOOR TILE - 500mm x 500mm**

Available in Industrial Grey / Safety Yellow

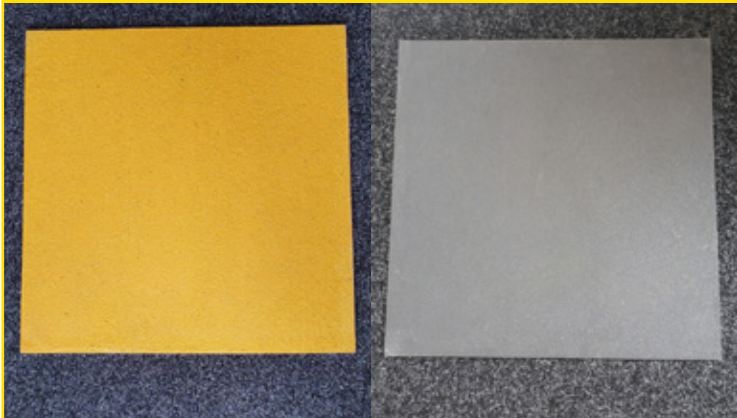

**SKU**

FRP-TG (Industrial Grey)  
FRP-TY (Safety Yellow)

**OPUS CO-EFFICIENT  
OF FRICTION:**

MEAN BP = 73 CLASS = P5

**BRIEF DESCRIPTION**

FRP floor tiles are light, easy to install and hard wearing.

- Corrosion resistant
- Wear and impact resistant
- UV resistant
- Flame retardant
- Light weight, easy to install and hard wearing